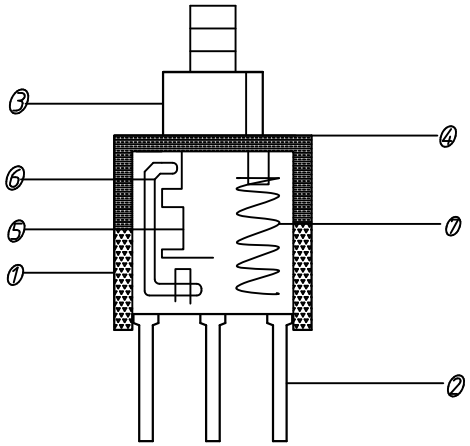

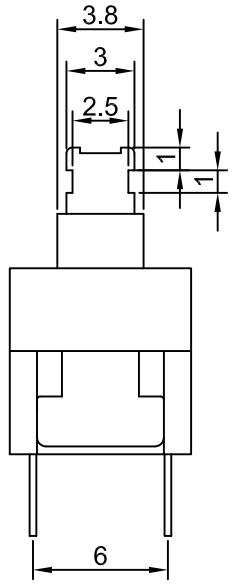

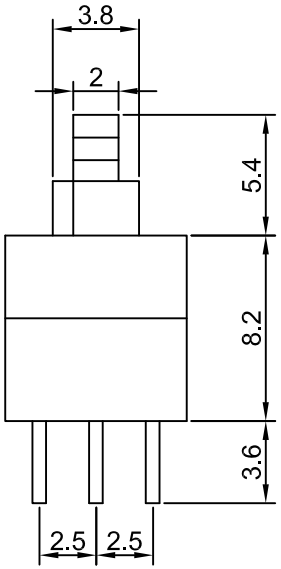

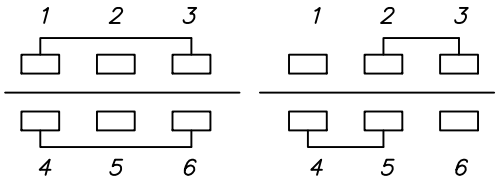

Circuit







P.C.B Layout

Specifications:

1.Rating:DC 30V 0.1A
2.Operating force:
Standard:(220±50gf)
Special:(300±80gf)
3.Corcuit:2C-2P
4.Stroke:Full 2.5mm
Lock 1.5mm
5.General tolerance:±0.2mm
6.Life:10,000 Cycles

BPS-2288( )-J

Push Switch
8x8 Series

Operating Mode:
L:Self lock(BLWB)
N:Non lock(BLWB)
NC:Non lock with click(BBW)

Dimensions unless otherwise specified	
Size Range	Tolerance
L ≤1	±0.15
1<L ≤8	±0.20
8<L ≤23	±0.25
23<L ≤50	±0.30
ANGAL	±1°

No.	PART NAME	Q'TY	MATERIAL	REMARK
7	Spring	1	carbon steel wire	
6	Crochet	1	Stainless Steel	
5	Reed	2	Ag/Copper	
4	Cover	1	POM	White
3	Stem	1	POM	Blue
2	Terminal	2	Silver-plated copper	Silver plating
1	Case	1	PA66	Black

单位	比例	日期	核准	审核	设计绘图	料号	BPS-2288( )-J	页数	1 / 1
mm	3:1	2013-01-22	Jason	GeFon	Ada	品名	Push Switch		
						图号	BPS-2288( )-J	版本	A

宇瑞电子股份有限公司 Alwin Electronics
TEL :886-2-22982258 FAX :886-2-22982259