

## 30V DUAL N-Channel Enhancement Mode MOSFET

### Description

The NP6800 uses advanced trench technology to provide excellent  $R_{DS(ON)}$  and low gate charge. The complementary MOSFETs may be used to form a level shifted high side switch, and for a host of other applications.

### General Features

$$V_{DS} = 30V, I_D = 4A$$

$$R_{DS(ON)} = 32m\Omega \text{ (typical) @ } V_{GS} = 4.5V$$

$$R_{DS(ON)} = 45m\Omega \text{ (typical) @ } V_{GS} = 2.5V$$

- ◆ Excellent gate charge x  $R_{DS(ON)}$  product(FOM)
- ◆ Very low on-resistance  $R_{DS(ON)}$
- ◆ 150 °C operating temperature
- ◆ Pb-free lead plating


### Application

- ◆ DC/DC Converter
- ◆ Ideal for high-frequency switching and synchronous rectification


### Package

- ◆ SOT-23-6L

### Schematic diagram

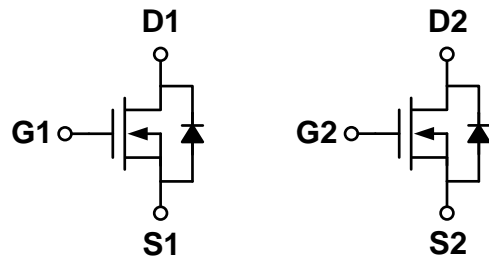

### Marking and pin assignment

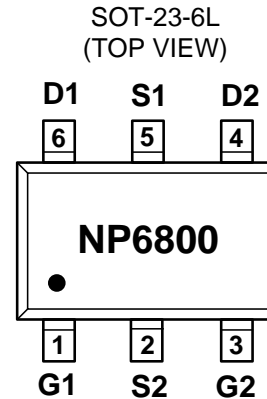

### Ordering Information

Part Number	Storage Temperature	Package	Devices Per Reel
NP6800MR-G	-55°C to +150°C	SOT-23-6L	3000

### Absolute Maximum Ratings (TA=25°C unless otherwise noted)

parameter	symbol	limit	unit
Drain-source voltage	$V_{DS}$	30	V
Gate-source voltage	$V_{GS}$	±12	V
Drain current-continuous <sup>a</sup> @ Tj=125°C -pulse <sup>b</sup>	$I_D$	4	A
	$I_{DM}$	16	A
Drain-source Diode forward current	$I_S$	4	A
Maximum power dissipation	$P_D$	1.4	W
Operating junction Temperature range	$T_j$	-55—150	°C

**Electrical Characteristics** ( $T_J=25^{\circ}\text{C}$  unless otherwise noted)


Parameter	Symbol	Condition	Min	Typ	Max	Unit
<b>OFF Characteristics</b>						
Drain-source breakdown voltage	$BV_{DSS}$	$V_{GS}=0V, I_D=250\mu A$	30	-	-	V
Zero gate voltage drain current	$I_{DSS}$	$V_{DS}=30V, V_{GS}=0V$	-	-	1	$\mu A$
Gate-body leakage	$I_{GSS}$	$V_{DS}=0V, V_{GS}=\pm 12V$	-	-	$\pm 100$	nA
<b>ON Characteristics</b>						
Gate threshold voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	0.6	0.9	1.3	V
Drain-source on-state resistance	$R_{DS(on)}$	$V_{GS}=4.5V, I_D=4A$	-	32	45	m $\Omega$
		$V_{GS}=2.5V, I_D=3A$		45	60	
Forward transconductance	gfs	$V_{GS}=5V, I_D=4A$	-	5	-	S
<b>Dynamic Characteristics</b>						
Input capacitance	$C_{ISS}$	$V_{DS}=15V, V_{GS}=0V$ $f=1.0\text{MHz}$	-	822	-	pF
Output capacitance	$C_{OSS}$		-	98	-	
Reverse transfer capacitance	$C_{RSS}$		-	76	-	
<b>Switching Characteristics</b>						
Turn-on delay time	$t_{D(ON)}$	$V_{DD}=15V$ $R_L=3.3\text{ohm}$ $V_{GEN}=4.5V$ $R_{GEN}=60\text{ohm}$	-	3.3	-	ns
Rise time	$t_r$		-	4.8	-	
Turn-off delay time	$t_{D(OFF)}$		-	25	-	
Fall time	$t_f$		-	4	-	
Total gate charge	Qg	$V_{DS}=15V$ $I_D=4A$ $V_{GS}=4.5V$	-	9.5	-	nC
Gate-source charge	Qgs		-	1.5	-	
Gate-drain charge	Qgd		-	3	-	
<b>DRAIN-SOURCE DIODE CHARACTERISTICS</b>						
Diode forward voltage	$V_{SD}$	$V_{GS}=0V, I_S=3A$	-	0.76	1.16	V

**Thermal Characteristics**

Thermal Resistance junction-to ambient	Rth JA	100	$^{\circ}\text{C/W}$
--	--------	-----	----------------------

## Package Information

- SOT-23-6L

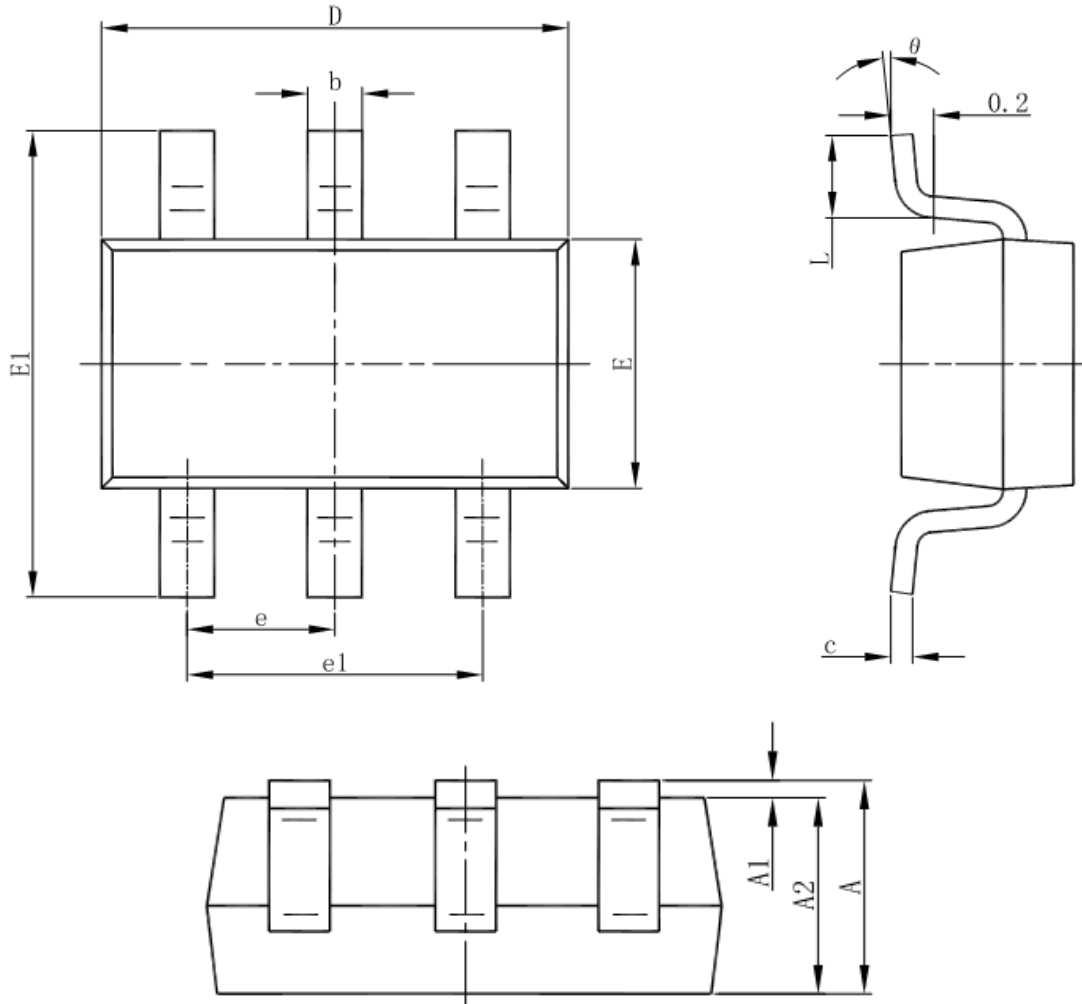

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°